NOTES:

1. HOLE IN GLAZING TO BE 4" TO 6"
2. 12 GA. #3 BRUSHED STAINLESS STEEL EXTERNAL DISCS
3. 1/4" DIA. STAINLESS SCREWS
4. TREMCO-440 GLAZING TAPE (BY OTHERS)

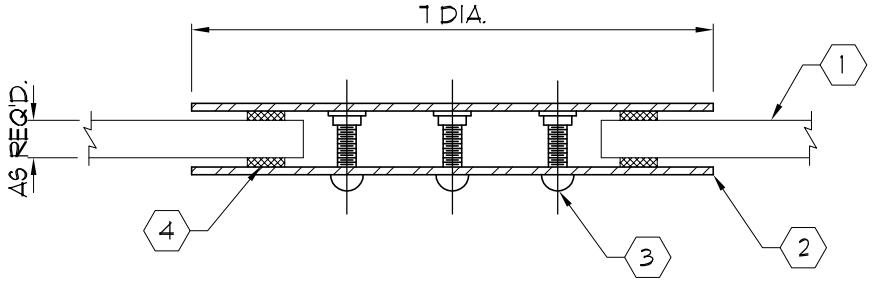

SECTION A-A

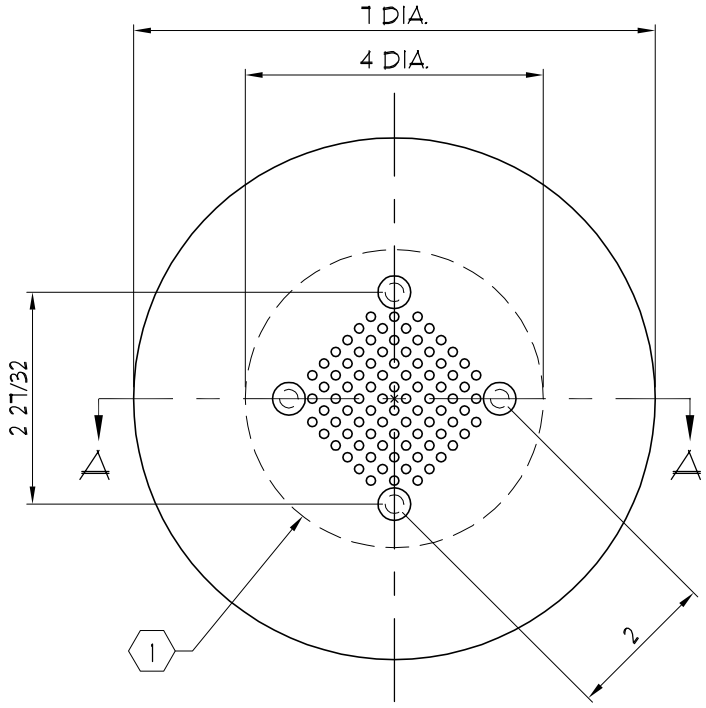

ELEVATION
(__ - REQUIRED)

UNIVERSAL DESIGN ALLOWS FOR INSTALLATION IN GLAZING WITH A THICKNESS OF 3/8" OR GREATER AND HOLE DIAMETERS BETWEEN 4" TO 6" GLAZING WITH TREMCO-440 OR EQUAL (BY OTHERS)

REVISIONS		
No.	DESCRIPTION	DATE

ARMORTEX ® BULLET / BLAST RESISTANT PRODUCTS
5926 CORRIDOR PKWY SCHERTZ, TX 78154
TEL: 210-661-8306 800-880-8306 FAX: 210-661-8308

TITLE: ARMORTEX ® UNIVERSAL SECURITY SPEAKER MODEL SSS-7S	PROJECT NAME:		SECURITY	
			DRN.BY: A. Perez	DATE: 02-16-07
			CHKD.BY:	DATE:
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SCALE: NONE	PROJECT No.	DRAWING No. S1014002	SHEET 1 OF 1

C:\ARMORTEX MASTERS - 2007\SPEAKERS\S1014002.DWG.DWG 02/20/07 @ 09:14 User: aperez