


# TRANSACTION DRAWER INSTALLATION INSTRUCTION MODEL SS-10D

1. CUT OPENING IN WALL
2. CUT COUNTER TOP OPENING AS SHOWN ON DRAWING
3. REMOVE DRAWER HANDLE
4. SLIDE DRAWER THROUGH OPENING AND SET WITH FLANGES ON TOP OF COUNTER
5. LOCATE DRAWER IN POSITION AND FASTEN WITH SCREW (6) (BY OTHERS)
6. REFIT DRAWER HANDLE
7. INSURE THE DRAWER IS CORRECTLY LOCATED AND IS FREE TO SLIDE SMOOTHLY

FOR UNUSUAL INSTALLATIONS, CONTACT SAFEGUARD SECURITY SERVICE FOR TECHNICAL ASSISTANCE.

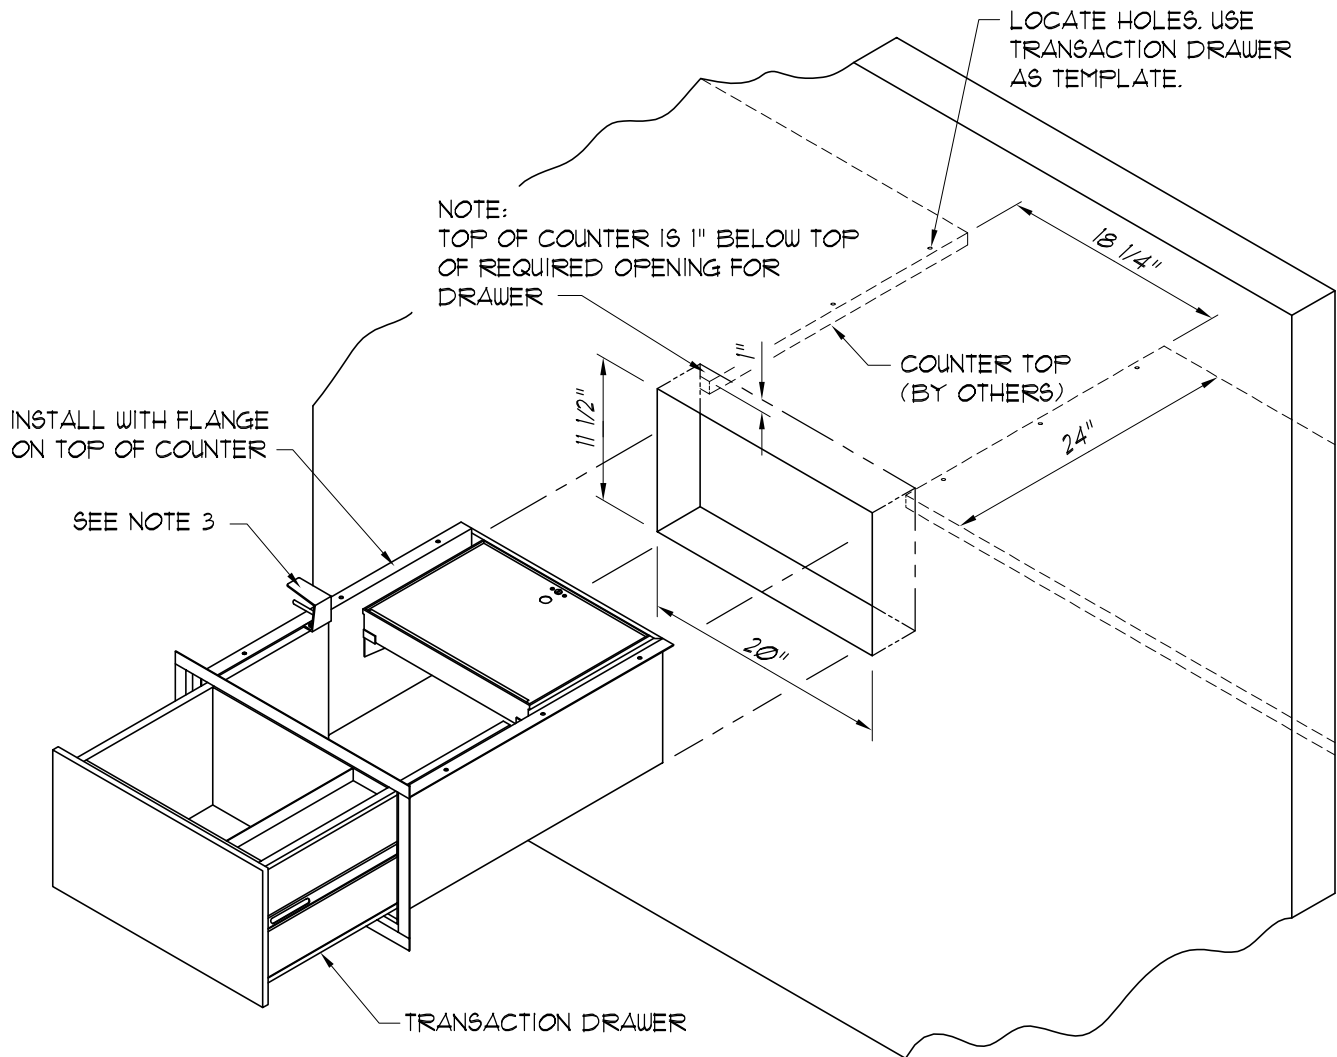

C:\MASTERS\ARMORTEX\INSTALL\INST9521.DWG.DWG 03/11/03 @ 11:05 User: andy perez

REVISIONS			<b>SAFEGUARD SECURITY SERVICES, Ltd.</b>		BALLISTIC LEVEL		
No.	DESCRIPTION	DATE	4728 GOLDFIELD, BLDG. 8 SAN ANTONIO, TX. 78218		DRN. BY:	DATE:	
			TEL: 210-661-8306 800-880-8306 FAX: 210-661-8308		A. Perez	03-14-03	
			TITLE: ARMORTEX® BULLET RESISTANT TRANSACTION DRAWER MODEL SS-10D	PROJECT NAME:	CHKD. BY:	DATE:	
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SCALE NONE	PROJECT No.	DRAWING No. INST9521	SHEET 1 OF 1